PLUS

WWW.ROTAID.COM









ROTAID PLUSPRODUCT SHEET

The Rotaid Plus is a robust and durable AED wall cabinet that ensures a recognizable and sustainable storage of your AED device. The characteristic round shape and design make it easy to be found and just a quick twist is needed to gain full access to the AED. The cover comes with AED logos and directive arrows to leave no room for interpretation.



The cabinet can be opened by an intuitive twist that removes the whole cover. The responder therefore has full access to the AED that hangs via a bracket for a quick and easy grab. The cover is attached to the back plate via a belt and needs no further attention from the responder. A stainless steel hook, attached to the bottom of the cabinet, can hold a seal, tag or other appliance.

The cover, equipped with recesses for an optimal grip and directive arrows, is made from 100% Polycarbonate. With a thickness of 5 millimetres it offers a solid protection and ensures a high grade of water- and dust resistance. Furthermore, the cover is fitted with UV filters, to protect from direct and indirect sunrays.




An audible alarm system alerts bystanders and is triggered when the cover is opened. It is powered by two AAA-batteries and therefore does not need electricity.



By modern production techniques and the use of recycled plastics, the Plus meets the highest requirements when it comes to sustainability.



ROTAID PLUSTECHNICAL DETAILS

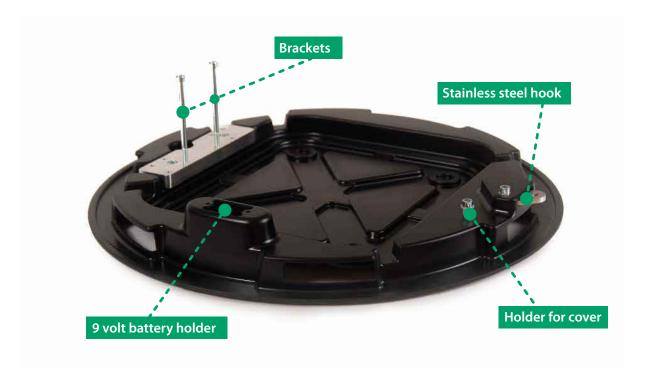

The Plus can house all AEDs from Physio-Control, including LIFEPAK® and HeartSine® AEDs and defibrillators.

Available in 4 variants (Green, Red, White, Yellow).



Length 18,5" Width 18,5" Depth 7,1" Weight 3,75 lbs

Packed individually by box, fastening materials included.



ROTAID PLUS SPEC SHEET

APPLICATION: Indoor usage. **WARNING:** not for outdoor usage!

DIMENSIONS

Lenght 47cm/18,5" Width 47cm/18,5" Depth 18 cm/7,1" Weight 1,7 kg/3,75 lb

BACKPLATE

100% recycled ABS (Acrylonitrile-Butadiene-Styrene), 4 mm thick

Solid aluminium holding block with mounting adaptor to house 2 DIN 912 8.8 EV M6x80

bolts (included) for optimal placement of the defibrillator.

Solid steel hook on the bottom to install tamper seal, instructions or other accessories.

5 mounting positions for firm fixation. 5 DIN 7981 A2 5,5 x 60mm screws and 5 DIN

9021 A2 M6x18x1,6 mm rings are included for installation on all walls.

COVER

100% recycled Polycarbonate, 5 mm thick, fully transparent, fitted with UV filters for long-lasting transparency and UV blocking.

A nylon belt is attached to the cover and connected to the back plate. The nylon belt is approximately 15,75 inches long and 2 inches thick and is fitted with brass rings.

4 directive arrows provide guidance for opening the device.

6 indents provide grip for guick and solid opening.

Available colors: green, yellow, red, white

ALARM SYSTEM

90dB audible system, triggered by coin sized low power magnet in the cover, has an ABS housing and is pre-installed and fixated to the back plate.

The alarm unit is powered by 2 AAA batteries.

On top of alarm is a reset button to pause the alarm system if required.

PACKAGING

White box, FEFCO 0201, that meets FSC requirements.

Box size 50 x 50 x 25 centimeters / 19,7 x 19,7 x 9,8 inches.